



Meaningful Innovation.

WEEE Number: 80133970

# INSTRUCTION MANUAL

## LED WATERPROOF FITTING



**IP65** **02** **YEAR**  
**RATING** **WARRANTY\***

### TECHNICAL DATA


MODEL	SKU	WATTS	LUMENS	CRI	DF	BEAM ANGLE	LIFE SPAN [Hours]	ON/OFF CYCLE	INPUT POWER	MATERIAL	DIMENSION	MAX CONNECTABLE UNITS
VT-80060	23087 23088	18W	1900Lm	≥80	≥0.7	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	600x59x47mm	20 pcs
VT-80120	23083 23084	36W	3900Lm	≥80	≥0.9	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	1200x59x47mm	10pcs
VT-80150	23085 23086	48W	5200Lm	≥80	≥0.9	120°	25,000	>15,000	AC:220-240V 50/60 Hz	PC	1500x59x47mm	8pcs

### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

### WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable, when the light source reaches its end of life the whole luminaire should be replaced.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.

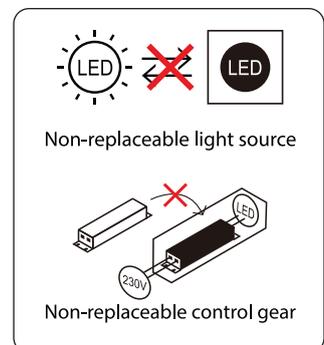

### MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.









This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.

## INSTALLATION INSTRUCTION

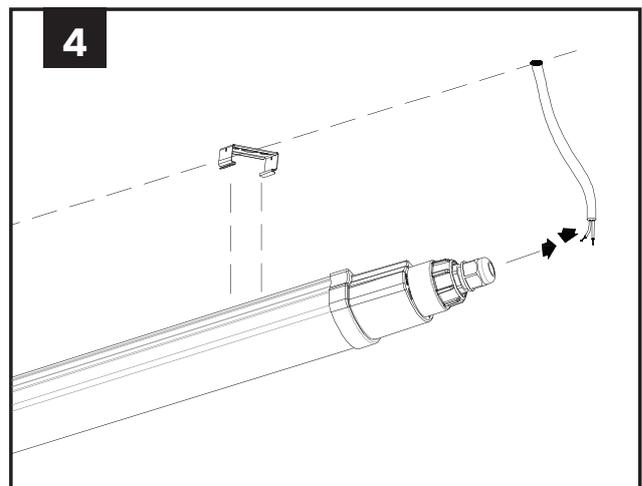
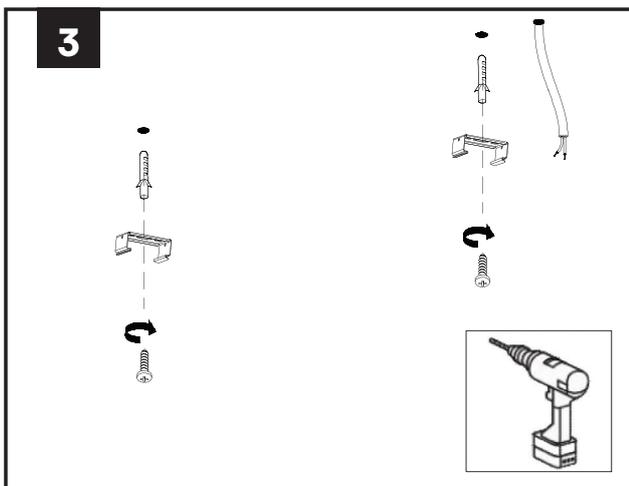
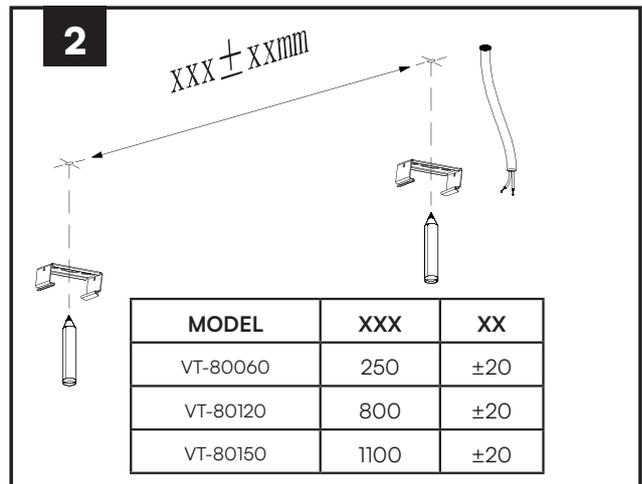
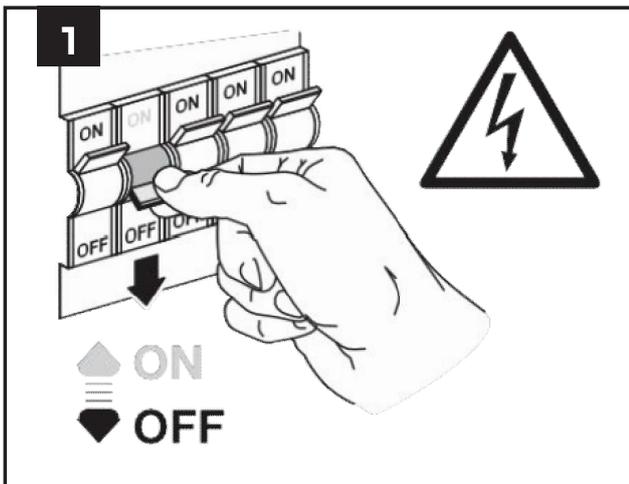
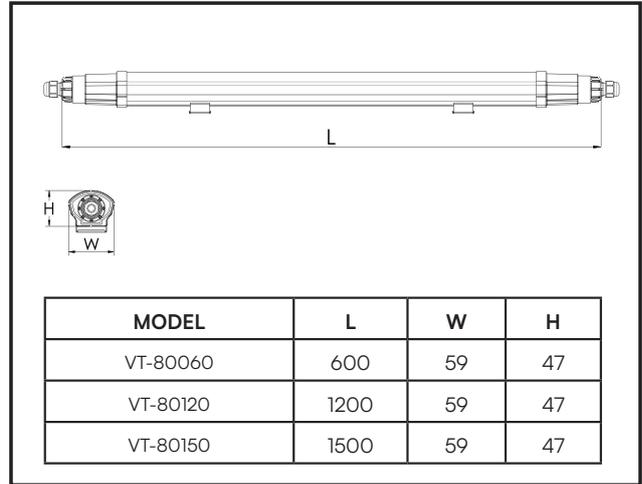
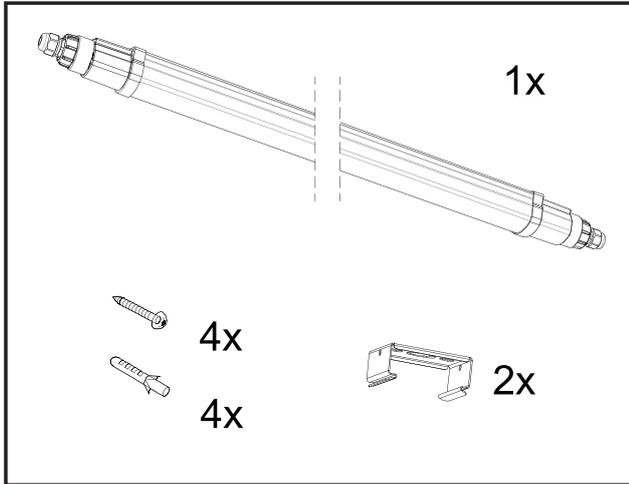


RoHS



UK  
CA



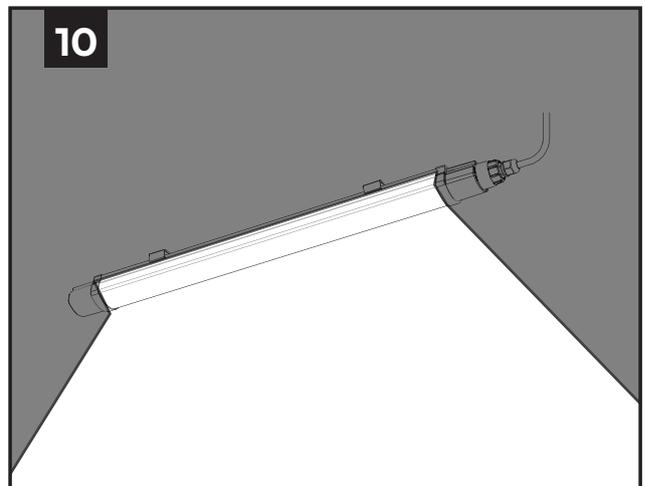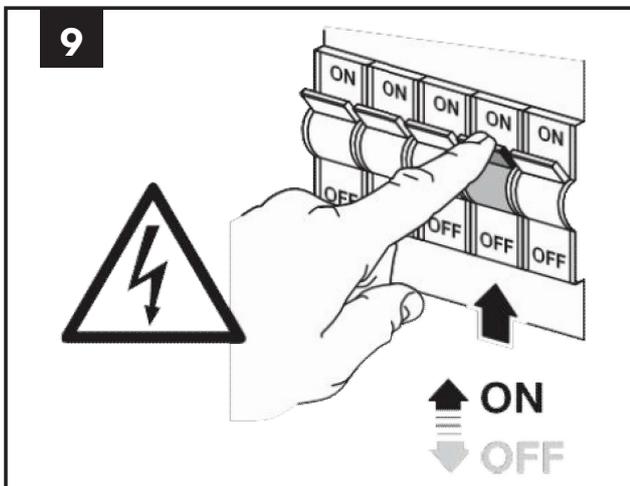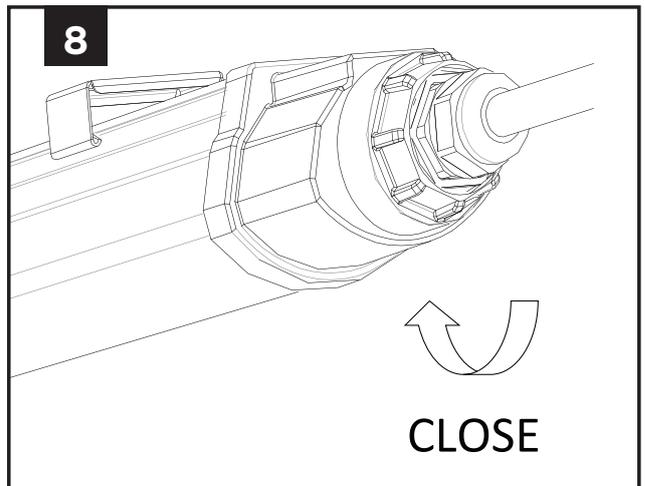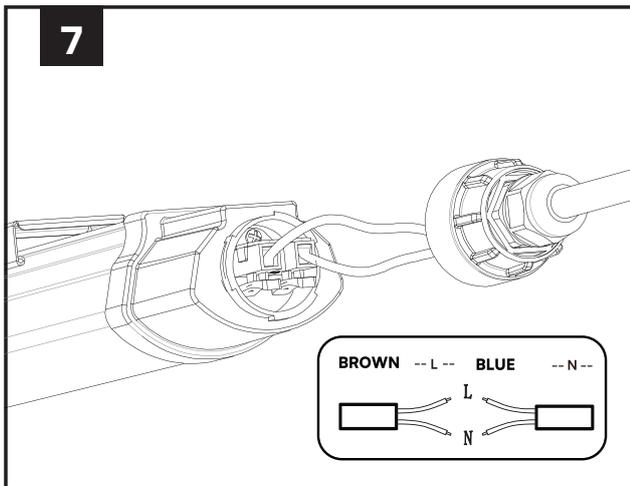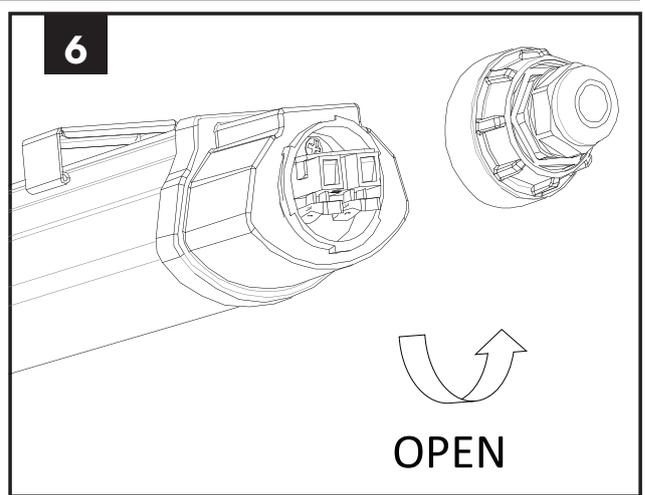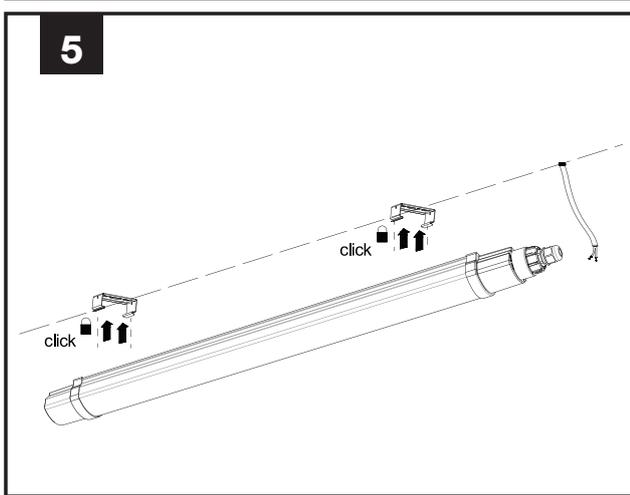

1. Turn off the the power.
2. Mark the proper drilling point as per the chart.
3. Fix the brackets onto the ceiling by offered screws. Open junction box cover of the body with screwdriver.
4. Make sure the cable length is appropriate.
5. Install the lamp to the ceiling clips.
6. Open the right side lid to connect wires.
7. Insert cable through the waterproof connector and wire it into terminal block. Make sure L and N are wired to correct holes. (LIVE = BROWN; NEUTRAL = BLUE)
8. Close the right lid.
9. Turn on the power and test.